





inLINE-183



Advantages

-  High quality high power LED by Cree.
-  Possibility of brightness regulation with PWM.
-  Possibility of connecting strips in chains.
-  Compatible with Ledil Tina 3 lenses.

Options

- Max. 3 x 600 mm strips connected in series.
- Available with Osram Oslon RGB LEDs.


Technical Data

power [W]	24
supply type	CV
operating voltage [V DC]	24
viewing angle [°]*	115
LED type [Cree]	XP-E RGB
LED quantity	18
PCB substrate	Al
lifetime-L80 B50 [h]	60 000

* Maximum angle at which LED intensity value is 50% of maximum intensity, observed at mechanical axis of LED.

Dimensions

L 600 mm W 22 mm H 4.5 mm

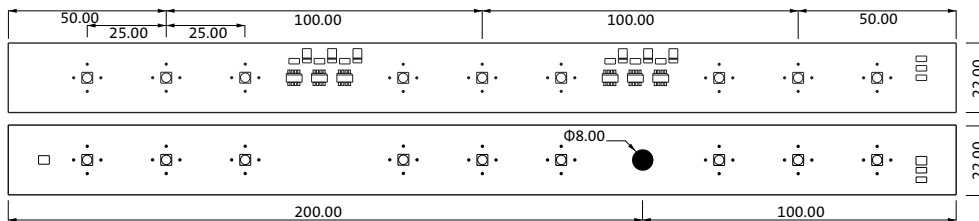

Note: Both PCBs form a single module and must be connected.

Order Code

code	color	current [mA]
21010183-RGB-xx-xx-xx-01	● R	350
	● G	480
	● B	150

Contact

Zabrv 61, SI-1292 Ig
 t 00386 1 286 22 37 w www.indata.si
 f 00386 1 286 22 38 e info@indata.si