

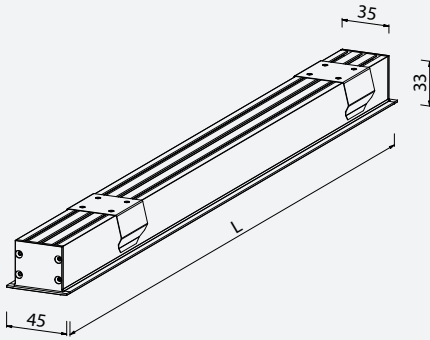



LAB3 | Recessed

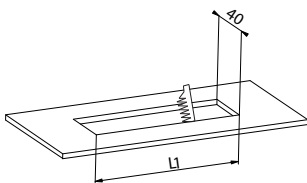

- recessed linear LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- standard ON/OFF or push dim DALi regulation
- rack version - standard or spring version - special
- external power supply
- available with emergency kit
- made in EU
- 24 month warranty

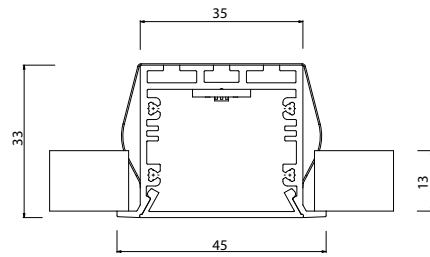

RECESS = L1(L-5 mm) x 40 mm



Order Code:

25LAB3R219- **A** - **B** - **C** - **D** - **E**

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	500	10	1107	15	1620
M06	595	12	1328	18	1944
M07	690	14	1549	21	2268
M08	785	16	1770	24	2592
M09	880	18	1992	27	2916
M10	975	20	2213	30	3240
M11	1070	21	2434	34	3564
M12	1165	23	2656	37	3888
M13	1260	25	2877	40	4212
M14	1355	27	3098	43	4536
M15	1450	29	3320	46	4861
M16	1545	31	3541	49	5185
M17	1640	33	3762	52	5509


code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1735	35	3984	55	5833
M19	1830	37	4205	58	6157
M20	1925	39	4426	61	6481
M21	2020	41	4647	64	6805
M22	2115	43	4869	67	7129
M23	2210	45	5090	70	7453
M24	2305	47	5311	73	7777
M25	2400	49	5533	76	8101
M26	2495	51	5754	79	8425
M27	2590	53	5975	82	8749
M28	2685	55	6197	85	9073
M29	2780	57	6418	88	9397
M30	2875	59	6639	91	9721

D HOUSING COLOUR


code	colour
WD	White
BD	Black

E LED CONTROL TYPE

code	type
/	ON/OFF
D	DALi





LAB3 | Ceiling

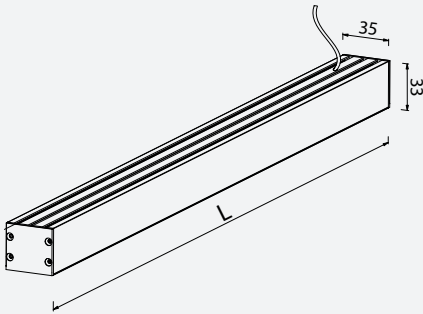

- surface linear LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- standard ON/OFF or push dim DALi regulation
- external power supply
- available with emergency kit
- made in EU
- 24 month warranty

Order Code:

25LAB3C219- **A** - **B** - **C** - **D** - **E**

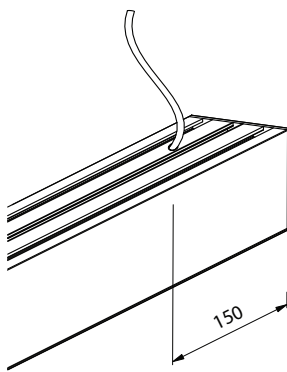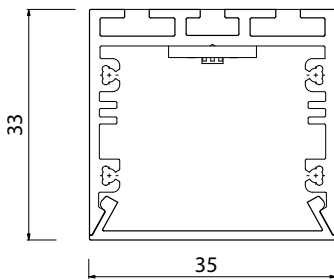

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	495	10	1107	15	1620
M06	590	12	1328	18	1944
M07	685	14	1549	21	2268
M08	780	16	1770	24	2592
M09	875	18	1992	27	2916
M10	970	20	2213	30	3240
M11	1065	21	2434	34	3564
M12	1160	23	2656	37	3888
M13	1255	25	2877	40	4212
M14	1350	27	3098	43	4536
M15	1445	29	3320	46	4861
M16	1540	31	3541	49	5185
M17	1635	33	3762	52	5509


code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1730	35	3984	55	5833
M19	1825	37	4205	58	6157
M20	1920	39	4426	61	6481
M21	2015	41	4647	64	6805
M22	2110	43	4869	67	7129
M23	2205	45	5090	70	7453
M24	2300	47	5311	73	7777
M25	2395	49	5533	76	8101
M26	2490	51	5754	79	8425
M27	2585	53	5975	82	8749
M28	2680	55	6197	85	9073
M29	2775	57	6418	88	9397
M30	2870	59	6639	91	9721

D HOUSING COLOUR

code	colour
WD	White
BD	Black

E LED CONTROL TYPE

code	type
I	ON/OFF
D	DALi



Indata d.o.o., Zabrav 61 1292 lg, Slovenija T: 0386 1 286 22 37 F: 00386 286 22 38 info@indata.si