



LAB4 | Ceiling

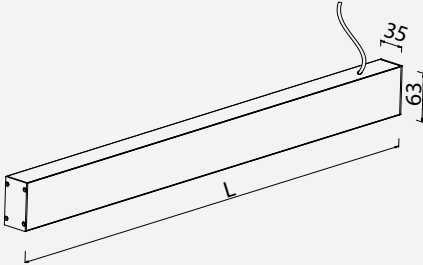

- surface linear LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- standard ON/OFF or push dim DALi regulation
- internal power supply installed
- available with emergency kit
- made in EU
- 24 month warranty

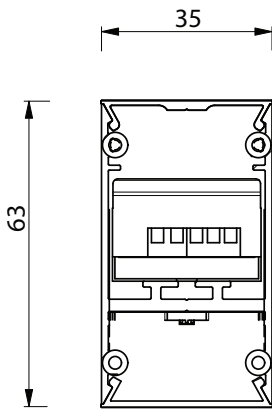

Order Code:

25LAB4C219- **A** - **B** - **C** - **D** - **E**

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	490	10	1107	15	1620
M06	585	12	1328	18	1944
M07	680	14	1549	21	2268
M08	775	16	1770	24	2592
M09	870	18	1992	27	2916
M10	965	20	2213	30	3240
M11	1060	21	2434	34	3564
M12	1155	23	2656	37	3888
M13	1250	25	2877	40	4212
M14	1345	27	3098	43	4536
M15	1440	29	3320	46	4861
M16	1535	31	3541	49	5185
M17	1630	33	3762	52	5509

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1725	35	3984	55	5833
M19	1820	37	4205	58	6157
M20	1915	39	4426	61	6481
M21	2010	41	4647	64	6805
M22	2105	43	4869	67	7129
M23	2200	45	5090	70	7453
M24	2295	47	5311	73	7777
M25	2390	49	5533	76	8101
M26	2485	51	5754	79	8425
M27	2580	53	5975	82	8749
M28	2675	55	6197	85	9073
M29	2770	57	6418	88	9397
M30	2865	59	6639	91	9721

D HOUSING COLOUR


code	colour
WD	White
BD	Black

E LED CONTROL TYPE




code	type
/	ON/OFF
D	DALi



LAB4 | Pendant

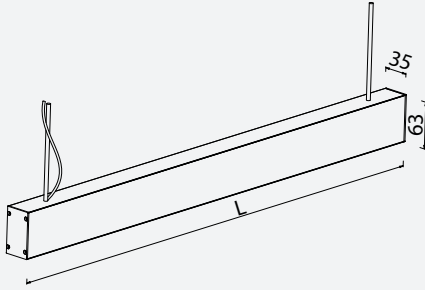

- pendant linear LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- standard ON/OFF or push dim DALi regulation
- internal power supply installed
- available with emergency kit
- suspending cables included
- made in EU
- 24 month warranty

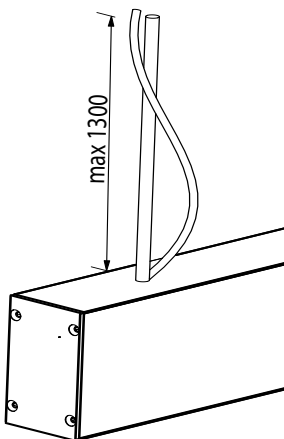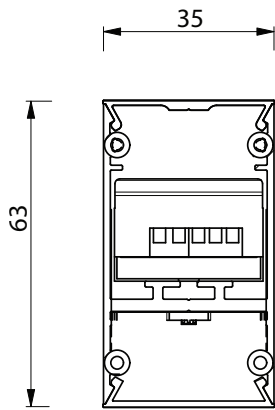

Order Code:

25LAB4C219- **A** - **B** - **C** - **D** - **E**

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	490	10	1107	15	1620
M06	585	12	1328	18	1944
M07	680	14	1549	21	2268
M08	775	16	1770	24	2592
M09	870	18	1992	27	2916
M10	965	20	2213	30	3240
M11	1060	21	2434	34	3564
M12	1155	23	2656	37	3888
M13	1250	25	2877	40	4212
M14	1345	27	3098	43	4536
M15	1440	29	3320	46	4861
M16	1535	31	3541	49	5185
M17	1630	33	3762	52	5509

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1725	35	3984	55	5833
M19	1820	37	4205	58	6157
M20	1915	39	4426	61	6481
M21	2010	41	4647	64	6805
M22	2105	43	4869	67	7129
M23	2200	45	5090	70	7453
M24	2295	47	5311	73	7777
M25	2390	49	5533	76	8101
M26	2485	51	5754	79	8425
M27	2580	53	5975	82	8749
M28	2675	55	6197	85	9073
M29	2770	57	6418	88	9397
M30	2865	59	6639	91	9721

D HOUSING COLOUR


code	colour
WD	White
BD	Black

E LED CONTROL TYPE




code	type
/	ON/OFF
D	DALi



LAB4 | Pendant direct-indirect

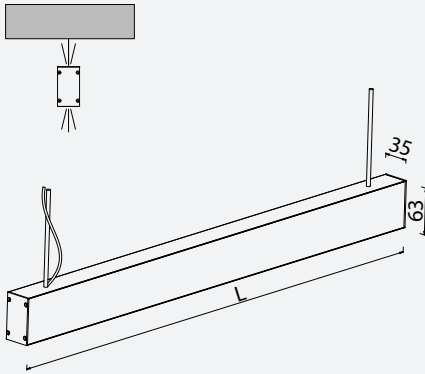

- pendant linear LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- direct and indirect lighting effects
- standard ON/OFF or push dim DALi regulation
- internal power supply installed
- available with emergency kit
- suspending cables included
- made in EU
- 24 month warranty

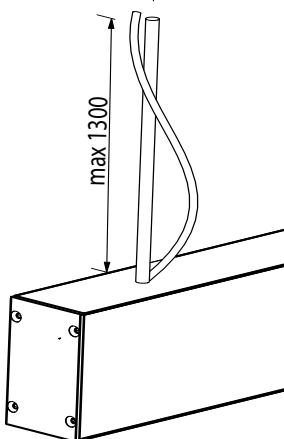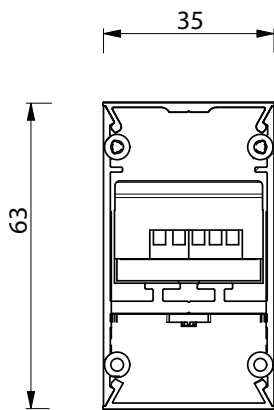

Order Code:

25LAB4C219- **A** - **B** - **C** - **D** - **E** |

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	490	10	1107	15	1620
M06	585	12	1328	18	1944
M07	680	14	1549	21	2268
M08	775	16	1770	24	2592
M09	870	18	1992	27	2916
M10	965	20	2213	30	3240
M11	1060	21	2434	34	3564
M12	1155	23	2656	37	3888
M13	1250	25	2877	40	4212
M14	1345	27	3098	43	4536
M15	1440	29	3320	46	4861
M16	1535	31	3541	49	5185
M17	1630	33	3762	52	5509

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1725	35	3984	55	5833
M19	1820	37	4205	58	6157
M20	1915	39	4426	61	6481
M21	2010	41	4647	64	6805
M22	2105	43	4869	67	7129
M23	2200	45	5090	70	7453
M24	2295	47	5311	73	7777
M25	2390	49	5533	76	8101
M26	2485	51	5754	79	8425
M27	2580	53	5975	82	8749
M28	2675	55	6197	85	9073
M29	2770	57	6418	88	9397
M30	2865	59	6639	91	9721


D HOUSING COLOUR

code	colour
WD	White
BD	Black

E LED CONTROL TYPE



code	type
/	ON/OFF
D	DALi



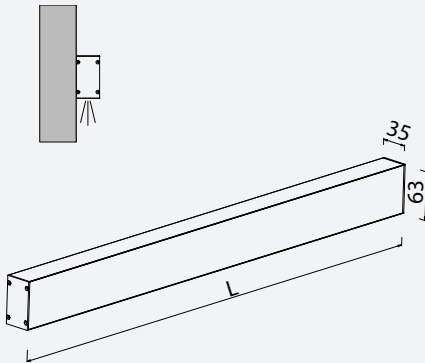

LAB4 | Wall

- surface wall mount LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- direct and indirect lighting effects
- standard ON/OFF or push dim DALI regulation
- internal power supply installed
- available with emergency kit
- made in EU
- 24 month warranty

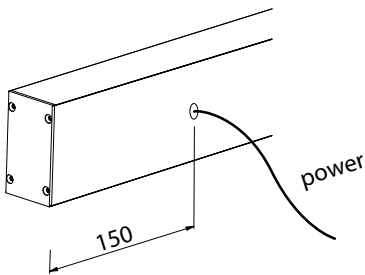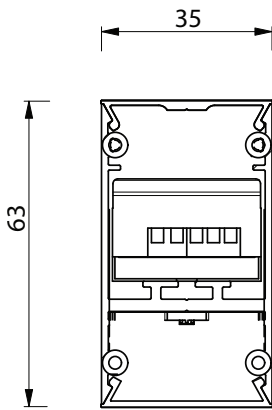

Order Code:

25LAB4W219- **A** - **B** - **C** - **D** - **E**

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	490	10	1107	15	1620
M06	585	12	1328	18	1944
M07	680	14	1549	21	2268
M08	775	16	1770	24	2592
M09	870	18	1992	27	2916
M10	965	20	2213	30	3240
M11	1060	21	2434	34	3564
M12	1155	23	2656	37	3888
M13	1250	25	2877	40	4212
M14	1345	27	3098	43	4536
M15	1440	29	3320	46	4861
M16	1535	31	3541	49	5185
M17	1630	33	3762	52	5509

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1725	35	3984	55	5833
M19	1820	37	4205	58	6157
M20	1915	39	4426	61	6481
M21	2010	41	4647	64	6805
M22	2105	43	4869	67	7129
M23	2200	45	5090	70	7453
M24	2295	47	5311	73	7777
M25	2390	49	5533	76	8101
M26	2485	51	5754	79	8425
M27	2580	53	5975	82	8749
M28	2675	55	6197	85	9073
M29	2770	57	6418	88	9397
M30	2865	59	6639	91	9721

D HOUSING COLOUR


code	colour
WD	White
BD	Black

E LED CONTROL TYPE



code	type
/	ON/OFF
D	DALI



LAB4 | Wall direct-indirect

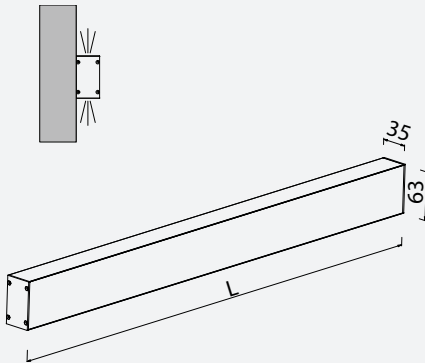

- surface wall mount LED luminaire
- IP40 protected
- aluminium profile housing, anodised, black or white colour finish
- polycarbonate diffuser
- direct and indirect lighting effects
- standard ON/OFF or push dim DALI regulation
- internal power supply installed
- available with emergency kit
- made in EU
- 24 month warranty

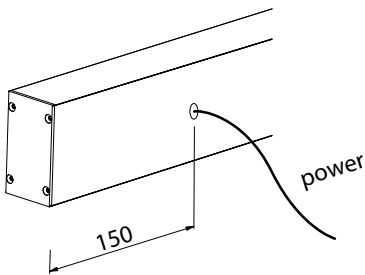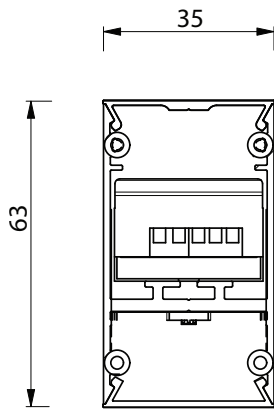

Order Code:

25LAB4W219- **A** - **B** - **C** - **D** - **E** |

A LED COLOUR TEMPERATURE

code	colour [K]
27	2700
30	3000
40	4000

C OUTPUT

code	current [mA]
L	low
N	standard
H	high

B LENGTH

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M05	490	10	1107	15	1620
M06	585	12	1328	18	1944
M07	680	14	1549	21	2268
M08	775	16	1770	24	2592
M09	870	18	1992	27	2916
M10	965	20	2213	30	3240
M11	1060	21	2434	34	3564
M12	1155	23	2656	37	3888
M13	1250	25	2877	40	4212
M14	1345	27	3098	43	4536
M15	1440	29	3320	46	4861
M16	1535	31	3541	49	5185
M17	1630	33	3762	52	5509

code	L-Luminaire [mm]	Power [W] @700mA	Real Lm @700mA	Power [W] @1050mA	Real Lm @1050mA
M18	1725	35	3984	55	5833
M19	1820	37	4205	58	6157
M20	1915	39	4426	61	6481
M21	2010	41	4647	64	6805
M22	2105	43	4869	67	7129
M23	2200	45	5090	70	7453
M24	2295	47	5311	73	7777
M25	2390	49	5533	76	8101
M26	2485	51	5754	79	8425
M27	2580	53	5975	82	8749
M28	2675	55	6197	85	9073
M29	2770	57	6418	88	9397
M30	2865	59	6639	91	9721

D HOUSING COLOUR

code	colour
WD	White
BD	Black

E LED CONTROL TYPE

code	type
I	ON/OFF
D	DALI

