



LAB5 Pendant

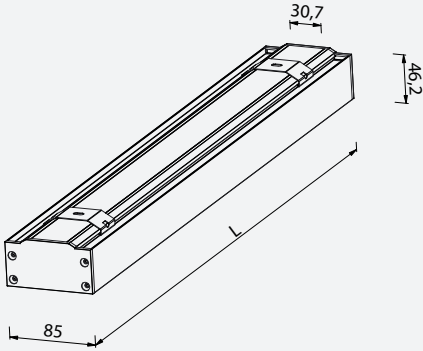

- pendant linear LED luminaire
- IP40 protected
- aluminium profile housing in white or black colour finish
- standard ON/OFF or push dim DALI regulation
- 145 Lm/W
- supply type 220V
- internal power supply installed
- available with emergency kit
- made in EU
- 24 month warranty

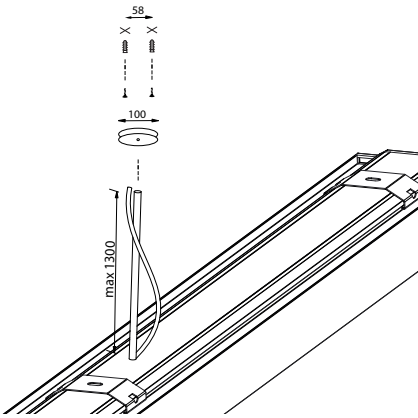

Order Code:

25LAB5P268 - **A** - **B** - **C** - **D** - **E** - **F**

A LED COLOUR TEMPERATURE

| code | colour [K] |
|------|------------|
| 27 | 2700 |
| 30 | 3000 |
| 40 | 4000 |

B OPTICS

| code | type |
|------|-----------|
| 3 | 30° |
| 6 | 60° |
| 9 | 90° |
| 1 | 110° |
| 0 | asimetric |

C LENGTH

| code | L-Luminaire [mm] | Power [W] high output | Real Lm high output | Power [W] low output | Real Lm low output |
|------|------------------|-----------------------|---------------------|----------------------|--------------------|
| M04 | 1158 | 49 | 7057 | 34 | 5193 |
| M05 | 1445 | 61,2 | 8821 | 42,5 | 6491 |
| M06 | 1731 | 73,4 | 10585 | 51 | 7789 |
| M07 | 2017 | 85,7 | 12349 | 54,5 | 9087 |
| M08 | 2306 | 97,9 | 14113 | 68 | 10385 |
| M09 | 2589 | 110,2 | 15877 | 76,5 | 11684 |
| M10 | 2875 | 122,4 | 17641 | 85 | 12982 |

D OUTPUT

| code | current [mA] |
|------|--------------|
| L | low |
| H | high |

E HOUSING COLOUR

| code | colour |
|------|--------|
| WD | White |
| BD | Black |

F LED CONTROL TYPE

| code | type |
|------|--------|
| / | ON/OFF |
| D | DALI |

