





inMODULE-268

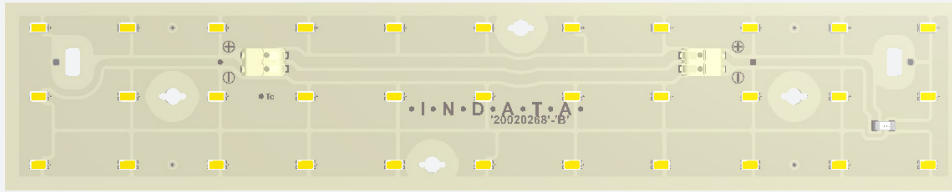

Advantages

-  High quality mid power LED by Samsung.
-  Possibility of brightness regulation with current.
-  Compatible with Vossloh 3R Gen 3 lenses.


Technical Data

max power [W]	12,8
supply type	CC
minimum current [mA]	100
maximum current [mA]	400
nominal forward voltage [V DC]	32
color rendering index R _a min	80
viewing angle [°]*	120
LED type [SAMSUNG]	LM561B+
LED quantity	33
PCB substrate	CEM3
lifetime-L80 B50 [h]	60 000

* Maximum angle at which LED intensity value is 50% of maximum intensity, observed at mechanical axis of LED.

Dimensions

L 280 mm W 55 mm

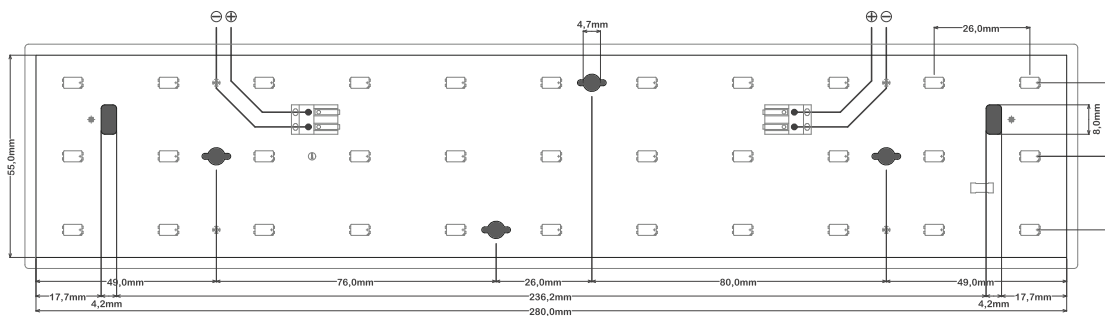

Order Code

● warm ● neutral ● cool white

code	color [K]	lum. flux [lm @ 350mA]
21010268-30-xx-xx-xx-01	3000	1600
21010268-40-xx-xx-xx-01	4000	1600

*minimum lum.flux calculated at 80°C

Contact

Zabrv 61, SI-1292 Ig

t 00386 1 286 22 37 w www.indata.si
f 00386 1 286 22 38 e info@indata.si